


The BS-1034 is a wall mount speaker that can be installed easily on the wall with help of the plug-in speaker receptacle.

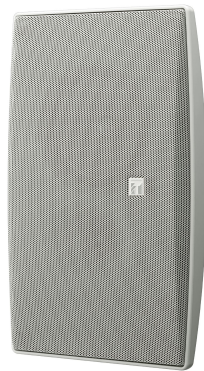


Order no: BS-1034


Specifications

Frequency response	120 Hz - 20 kHz
Connection	M4 screw terminal, distance between barriers: 11 mm
Sensitivity (1#V, 1#n) (combined)	90 dB
Speaker component	Low: 12 cm cone-type, High: Balanced dome-type
Rated input	10 W
Tappings	10 / 5 / 3 / 1 W (100 V), 10 / 5 / 2.5 / 1.5 / 0.5 W (70 V)
Rated impedance	70 V, 100 V
Weight	1,4 kg
Certificates	UL, Ease
Dimensions (W x H x D)	210 x 330 x 80 mm
Dimensions (ø x D)	x 80 mm
Gross weight	1,95 kg
Finish	HIPS resin, off-white (RAL 9010 or equivalent)


Appearance

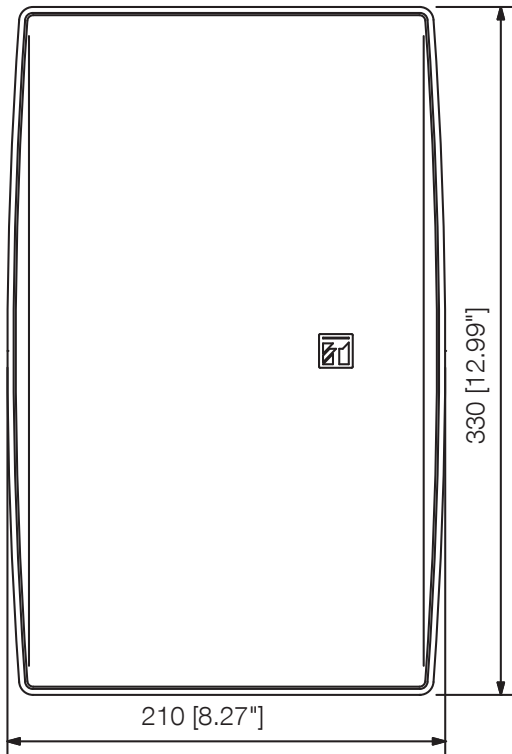

Front View

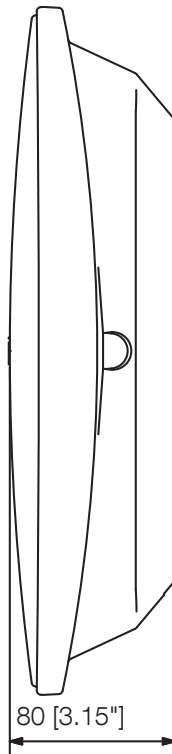

Side View

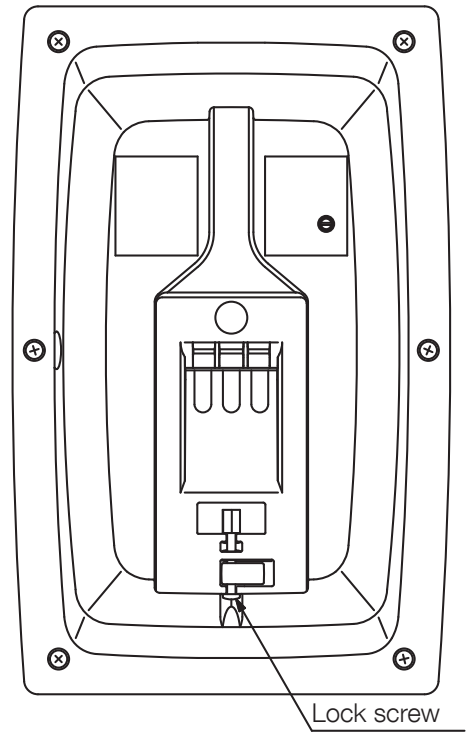

Rear View