

The ER-2230W is a shoulder megaphone having facilities of EXT. mic input, an AUX input, a DC power input, a battery meter whistle sound. It can be mounted to the optional ST-16A speaker stand. The newly developed poly-imide diaphragm is employed to ensure high sound quality.



Order no: ER-2230W EU
Alternative products: ER-2215, ER-2215W,
ER-2930W


Specifications

Power source	10 x 1,5 V (R 20P)
Rated output	30 W (45 W max.)
Battery life	17 h
Battery life on signal	90 min
Ext. MIC Input	600 Ω, unbalanced, ø6.6 phone jack, stereo plug acceptable, volume control
Signals	Whistle
Audible range	800 m (Whistle 1,000 m)
Weight	3,8 kg
Dimensions (W x H x D)	x 512
Dimensions (ø x D)	351 x 512 mm
Gross weight	5,55 kg
Finish	Aluminium, ABS resin, die-cast, light grey (RAL 7035 or equivalent), grey
Operating temperature	-10 °C to +40 °C

Appearance

<Note on the audible range and battery life>

1. The indications of the audible range and battery life are based on the JEITA Standard (*2).
2. Audible Range presumes that the megaphone employs new batteries and is used on a quiet street.
It varies depending on such conditions as battery consumption, ambient noise, wind direction and obstacles.
3. Battery Life assumes that megaphone is used for 30 minutes a day.

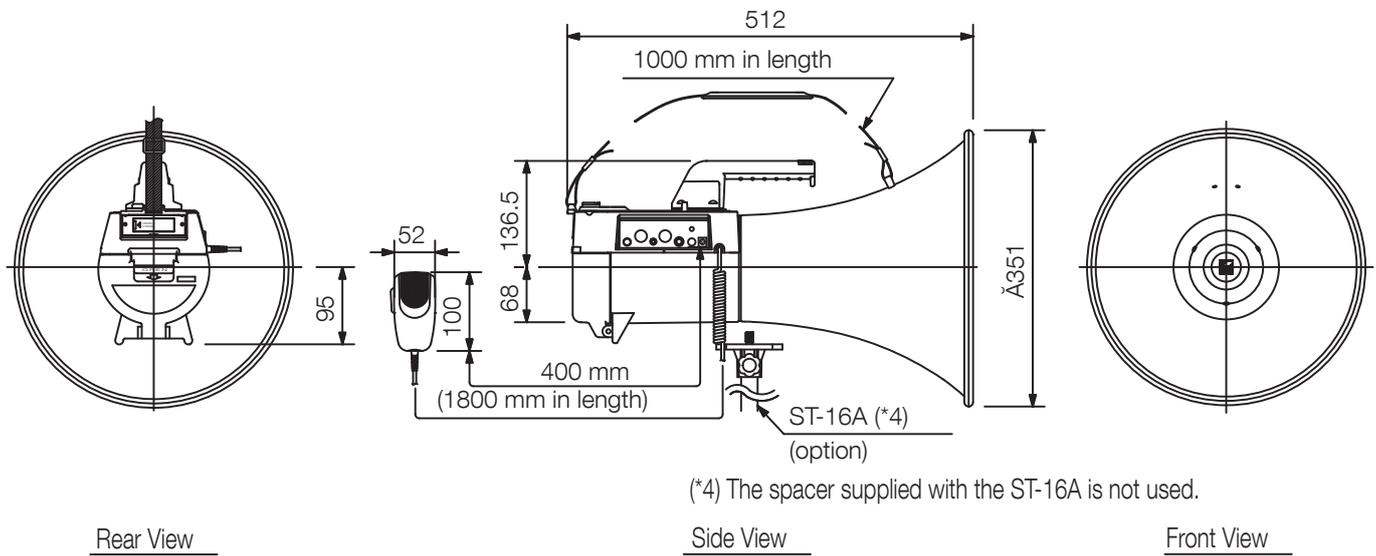

(*4) The spacer supplied with the ST-16A is not used.

UNIT:mm SCALE:1/10